



MS Segment Display

Features:

- Compact size; ideal for modernisation
- 3 wire connection carrying both serial data and power supply to the display
- Easy connection to Gong, LED Hall Lantern, Speech unit through MX series encoder
- Choice of different character height
- Standard LED colour: ● red

* Pictures for illustration only ; stainless steel fixture not provided.

GENERAL SPECIFICATIONS	MS1220N	MS1220V	MS2510V	MS2511V	MS2520V	MS2521V	MS5510H	MS5520H	MS5521H	MS5522H
Viewing Area (mm) [W x H]	25 x 35	25 x 35	23 x 33	23 x 33	48 x 49	47 x 48	96 x 70	144 x 70	144 x 70	96 x 70
Overall Display Dimension (mm) [W x H x D]	43 x 43 x 52	35.5 x 91.5 x 38.5	38 x 120 x 17.5	35 x 92 x 39	61 x 91.5 x 33	57 x 144.5 x 18	167.5 x 78.5 x 28	190.5 x 79 x 28	165 x 70 x 33	167.5 x 78.5 x 28
Number of 16 Segment Display	2	2	1	1	2	2	1	2	2	2
Character Height (mm)	13.8	13.8	25.4	25.4	25.4	25.4	58	58	58	58

* Specifications are subject to change

Accessories CX Encoder

- Use with CD/CT and UD/UT series display products
- 14(CX7012) or 24(CX7005) opto-isolated inputs from lift controller
- 4 wire serial output to display unit
- RS232 interface for PC configuration



CX7005

MX Encoder



- Use with MS series display products
- 16(MX016X) or 41(MX041X) opto-isolated inputs from lift controller
- 3 wire serial output to display unit



MX016X

* Direct interfaces to different lift controllers are also available upon request.

Dot Matrix and Segment Display

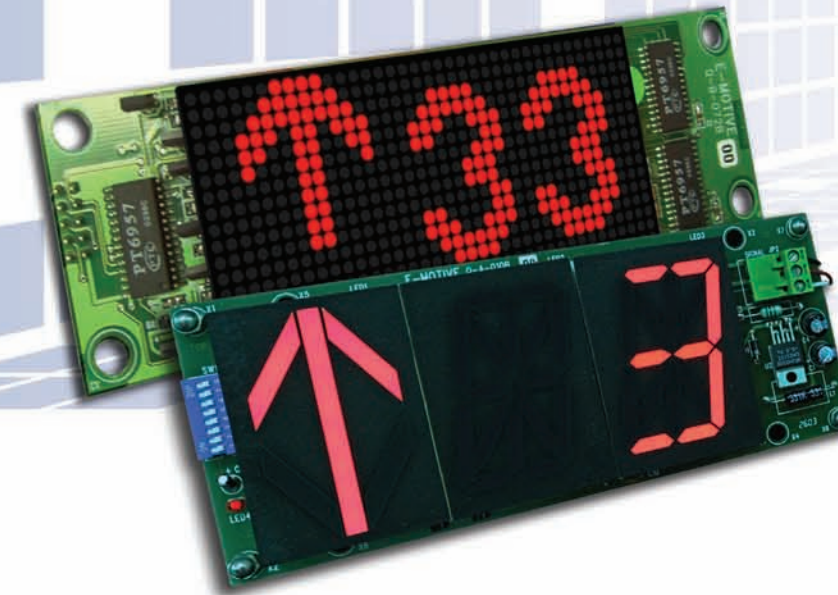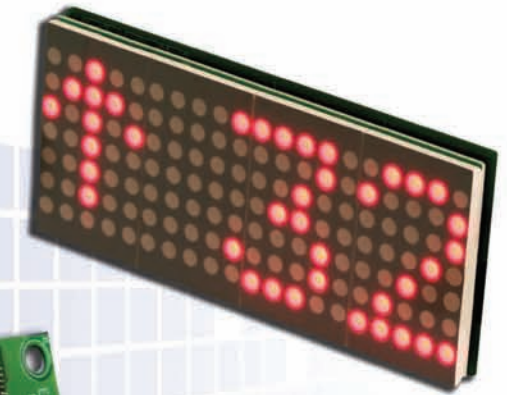

Corporate Offices:

TL Jones Asia Pacific Pte Ltd
Singapore +65 6776 4111
www.tljones.com
E-Motive Display Pte Ltd
Singapore +65 6776 4111
www.emotivedisplay.com

Regional Sales Offices:

Australia (call free) 1 800 886 889
Japan +81 3 5847 8329
New Zealand +64 3 349 4456
UAE +971 4 295 5648
UK +44 1628 770 734
USA +1 631 864 3699

China:

Shanghai +86 21 6495 3748
Guangzhou +86 20 8797 9936

India:

Mumbai +91 22 4215 0700/1/2
New Delhi +91 11 2553 7775

A HALMA COMPANY



A HALMA COMPANY

